

QSO Office Booth L

Technical information



Other documents available for this product

Technical information for OFFICE BOOTH S, M,
XL Ordering guidelines for OFFICE BOOTH
User manual for OFFICE BOOTH
Troubleshooting manual for OFFICE BOOTH
Technical guide for OFFICE BOOTH

Warranty

See Warranty statement



Technical information

External Walls

Options

- Upholstered with fabric (1)
- Melamine (2)
- Upholstered with fabric. Rear wall with glass (3)
- Melamine. Rear wall with glass (4)

5 panels upholstered with fabric

- Welded frame is made of metal tube 1.57" x 0.78";
- Angular brackets are made of 1.57" x 1.57" metal tubes;
- Powder coated metal;
- Plastic feet with height levelling (+1.18");
- 0.47" MFC (melamine);
- Covered with 0.12" foam;
- Upholstered with fabric.

1 solid panel from melamine

- Welded frame is made of metal tube 1.57" x 0.78";
- Angular brackets are made of 1.57" x 1.57" metal tubes;
- Powder coated metal;
- Plastic feet with height levelling (+1.18");
- 16 mm MFC (melamine) with 1 mm ABS edging.

Walls with glass panes

- Welded frame is made of metal tube 1.57" x 0.78";
- Powder coated metal;
- Inside gasket is made of 0.47" MFC (melamine) with 1 mm ABS edging;
- Front sides and top of the metal frame are covered with 0.63" MFC (melamine) with 1 mm ABS edging;
- 0.31" TSG (tempered safety glass), clear.



Internal acoustic walls (1)

Panels upholstered with fabric

- Frame is made of 1.57" x 0.78" metal tube;
- Powder coated metal;
- 0.47" MFC (melamine);
- 1.57" of acoustic foam;
- Upholstered with fabric.

Internal front walls

Options

- Upholstered with fabric (2)
- Melamine panel (3)
- If you order external walls with glass panes, you do not need to choose internal front walls


Melamine panel

- Frame is made of 1.57" x 0.78" metal tube;
- Powder coated metal;
- 0.63" MFC (melamine) with 1 mm ABS edging.


Panels upholstered with fabric

- Frame is made of 1.57" x 0.78" metal tube;
- Powder coated metal;
- 0.47" MFC (melamine);
- Covered with 0.12" foam;
- Upholstered with fabric.

1



2



3



Internal front central wall

Options

- Internal front central wall with electronic control system (1)
- Internal front central wall with low table, VESA mount and electronic control system (2)
- Internal front central wall with high table, VESA mount and electronic control system (3)

Wall with control unit

- Top front panel is made of 16 mm MFC with 1 mm ABS edging;
- Bottom front panel with hinges is made of 0.63" MFC with 1 mm ABS edging;
- Sides and internal construction parts are made of 0.63" MFC with 0,5 mm ABS edging;
- Ventilation and lighting dimming knobs are made of PA 2200 (Nylon);
- Cable guides are located on both sides of the wall (only for units without tables).

Table


- 28.35" or 41.34" tabletop height option;
- Tabletop is made of 0.63" MFC (melamine) with 1 mm ABS edging;
- Box for wires (5.31"x5.90"x3.94") underneath the table top is made of 1 mm powder coated metal sheet;
- Table frame is made of 1.57" x 0.78" metal tube;
- Top of the leg is made of 2.75" x 0.78" metal tube;
- Leg base is made of 1.57" x 1.57" metal tube;
- Powder coated metal;
- Feet with height levelling (+0.39").

Control box (3)

- Input (GST18i3 male): 100-240 V;
- Output (GST18i3 female): 100-240 V;
- Frequency: 50/60 Hz;
- Power cable: EU, UK, FR, CH, US – GST18i3 female, 3 m;
- Power output cable length: 0,5 m – GST18i3 male – GST18i3 female;
- Power consumption – max. 229W, standby 4,5W.

Screen bracket

- Screen bracket base is made from 2.75" x 0.79" powder coated metal tube;
- VESA plate (4.72" x 4.72") is made of 0.08" metal sheet;
- VESA standards – 2.95" x 2.95", 3.94" x 3.94" and recommended weight is up to 22 Lbs;
- Recommended screen size is up to 32";
- VESA plate can be fixed to the holder in 3 different heights;
- Bolts for flat screen assembly are not included.



Ceiling (1)

Composition

- Double layered ceilings are made of 0.47" top and 0.63" bottom MFC (melamine) panels with 1 mm ABS edging;
- Frame is made of 1.97" x 0.78" metal tube;
- PIR sensor mounted in to central ceiling segment;
- Fan grills are made of 0.04" metal sheet;
- Powder coated metal;
- Air supply duct inside glued with acoustic foam;
- Ø2.36" cable grommet for optional power supply from ceiling.

Lighting

- 6x LED modules (8,92W) colour temperature approx. 3000 K dimmable;
- 6x LED housing (asymmetrical) made of aluminium;
- Replacement for LED modules can only be purchased from the manufacturer.

Ventilation

- 8x air supply fans are located in central segment of the ceilings;
- 2x air exhaust slots are located in central segment of the ceilings for natural ventilation;
- Maximum airflow approx. 800 m³/h.

Glass facade with doors (2)


Doors

- Left-handed or right-handed option;
- Metal door frame is made of 1.57" x 1.57" tube and 1.57" x 0.31" steel rod;
- Powder coated metal;
- Aluminium profiles with PVC sealing fixed to internal sides and top and bottom of door frame;
- Top of the metal frame is covered with 0.63" MFC (melamine) with 1 mm ABS edging;
- 0.31" TSG (tempered safety glass), clear;
- Clear width of a door opening - 29.53".


Glass facade

- Metal door frame is made of 1.57" x 0.78" tube;
- Powder coated metal;
- Inside gasket is made of 0.47" MFC (melamine) with 1 mm ABS edging;
- Front sides and top of the metal frame are covered with 0.63" MFC (melamine) with 1 mm ABS edging;
- 0.31" TSG (tempered safety glass), clear.

1



2



Floors (optional) (1)

- Metal floor frame is made of 1.57" x 1.57" and 1.57" x 0.78" tube;
- Powder coated metal;
- Floor panels are made of 0.98" MFC with 0,5 mm ABS edging;
- Floor carpet thickness 0.12", made of PA6 (40%) and PP (60%);
- Skirting boards made of 0.63" MFC with 0.04"ABS edging;
- Plastic feet with height leveling (+1.18").
- Note that the floor adds approximately 2.75" to the overall height.

Carpet (optional) (2)

- Carpet thickness 0.25", made of 100% polyamide, antistatic;
- It is highly recommended to use the carpet when placing the OFFICE BOOTH on the hard flooring.
- If you are planning to place the OFFICE BOOTH on your carpet, you do not need to order the additional carpet.
- Uneven floor can be the cause of sound insulation problems.

1



2



Electrical specification

Power socket (ARU704)

- 1 AC power socket 100-240 V;
- Integrated USB fast charger (USB Type A+C, max 5A);
- 1 cable guide for multimedia cable;
- Mounting in Ø3.15" cut-out;
- Dimensions: Ø3.54" x 2.60";
- Power socket standards: EU, FR, UK, CH, US;
- Cable length: 0,8 m.

Power socket (ARU703)

- 1 AC power socket 100-240 V;
- Dimensions: 3.54" x 2.60";
- Mounting in Ø3.45" cut-out;
- Power socket standards: EU, FR, UK, CH, US;
- Cable length: 0,8 m.

Power socket block set for media (ZZZ336)

- 3 AC power sockets 100-240 V;
- Dimensions: 10.24" x 2.36" x 1.77";
- Adaptor block GST18i3 T-type - 1x male, 2x female;
- Power socket standards: EU, FR, UK, CH, US;
- Extension cable length: 0,5 m - GST18i3 male - GST18i3 female.

ARU704



ARU703



ZZZ336



Power unit for media wall (ZZZ340)

- 3 AC power sockets 100-240 V;
- Dimensions: 10.24" x 2.36" x 1.77";
- Metal frame 12.48" x 4.68" x 1.57", made from 0.08" metal sheet;
- Powder coated metal;
- Mounting in 11.8" x 4.33" cut-out;
- Power socket standards: EU, FR, UK, CH, US;
- Extension cable length: 1 m - GST18i3 male - GST18i3 female.

Power unit for media wall (ZZZ341)

- 2 AC power sockets 100-240 V;
- 1 LAN outlet (CAT6 RJ45) with 2 m flylead;
- Dimensions: 10.24" x 2.36" x 1.77";
- Metal frame 12.48" x 4.68" x 1.57", made from 2 mm metal sheet;
- Powder coated metal;
- Mounting in 11.8" x 4.33" cut-out;
- Power socket standards: EU, FR, UK, CH, US;
- Extension cable length: 1 m - GST18i3 male - GST18i3 female.

Power unit for media wall (ZZZ342)

- 2 AC power sockets 100-240 V;
- 1 Integrated USB fast charger (Type A+C, max 5A);
- Dimensions: 10.24" x 2.36" x 1.77";
- Metal frame 12.48" x 4.68" x 1.57", made from 2 mm metal sheet;
- Powder coated metal;
- Mounting in 11.81" x 4.33" cut-out;
- Power socket standards: EU, FR, UK, CH, US;
- Extension cable length: 1 m - GST18i3 male - GST18i3 female

Power unit for media wall (ZZZ343)

- 1 AC power sockets 100-240 V;
- 1 Integrated USB fast charger (Type A+C, max 5A);
- 1 LAN outlet (CAT6 RJ45) with 2 m flylead;
- Dimensions: 10.24" x 2.36" x 1.77";
- Metal frame 12.48" x 4.68" x 1.57", made from 2 mm metal sheet;
- Powder coated metal;
- Mounting in 11.81" x 4.33" cut-out;
- Power socket standards: EU, FR, UK, CH, US;
- Extension cable length: 1 m - GST18i3 male - GST18i3 female.

ZZZ340



ZZZ341



ZZZ342



ZZZ343




Range

Fabric + fabric back version

Product weight: 1,505


Total height with floor: 90.78"

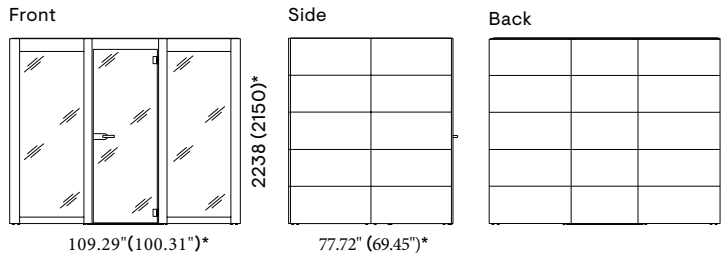

Melamine + melamine back version

Product weight: 704 kg


Total height with floor: 90.78"

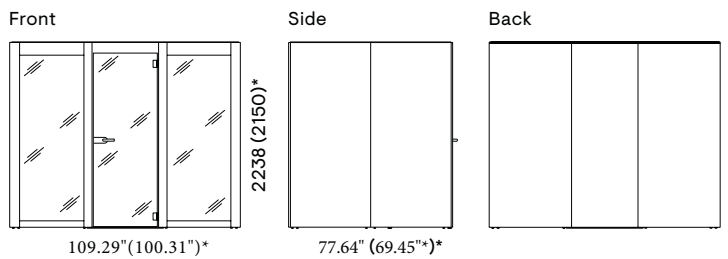

Fabric + glass back version

Product weight: 675 kg


Total height with floor: 90.78"

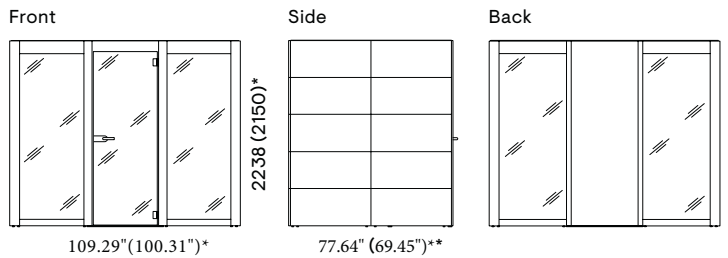

Melamine + glass back version

Product weight: 685 kg

Total height with floor: 90.78"

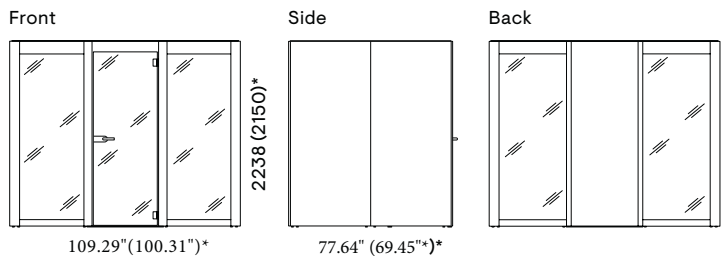

* External dimension (internal dimension)


! Recommended height of the space for OFFICE BOOTH installation – ≥94.49"(without floor).
 Recommended height of the space for OFFICE BOOTH installation – ≥97.24"(with floor).

Additional information


Shipping dimensions

WxDxH:
2250x890x810 mm, 2250x1000x945 mm – 2 palletes
(Accessories are not included)

Height of shipping dimensions will be slightly smaller for OFFICE BOOTH with external rear wall with glass panes.

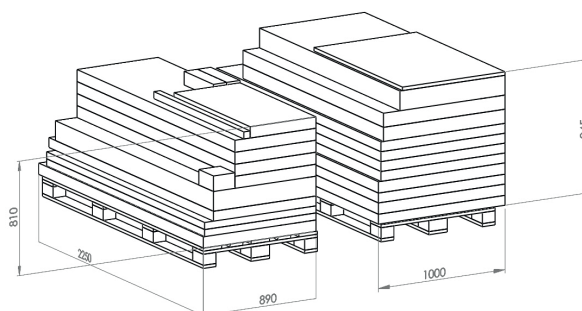

Automatic operation

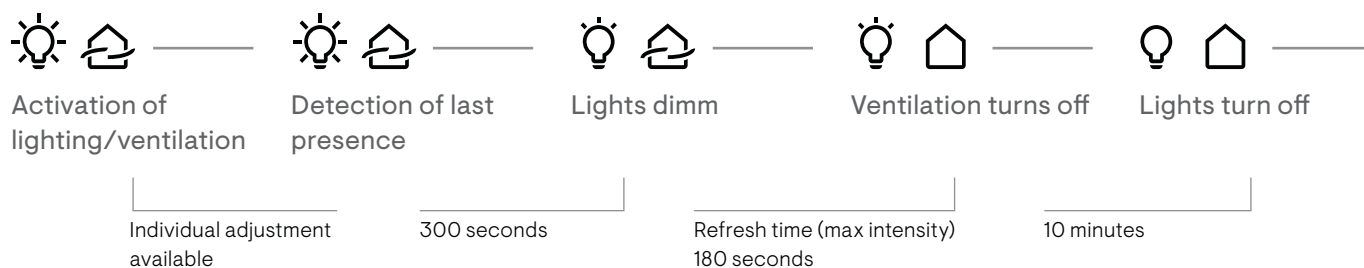

Information about available accessories for this range can be found in our product pricelists.